




Data sheet liquidring pump

Series L-BV2 | L_200
Range 2BV2 061 Compressor ATEX

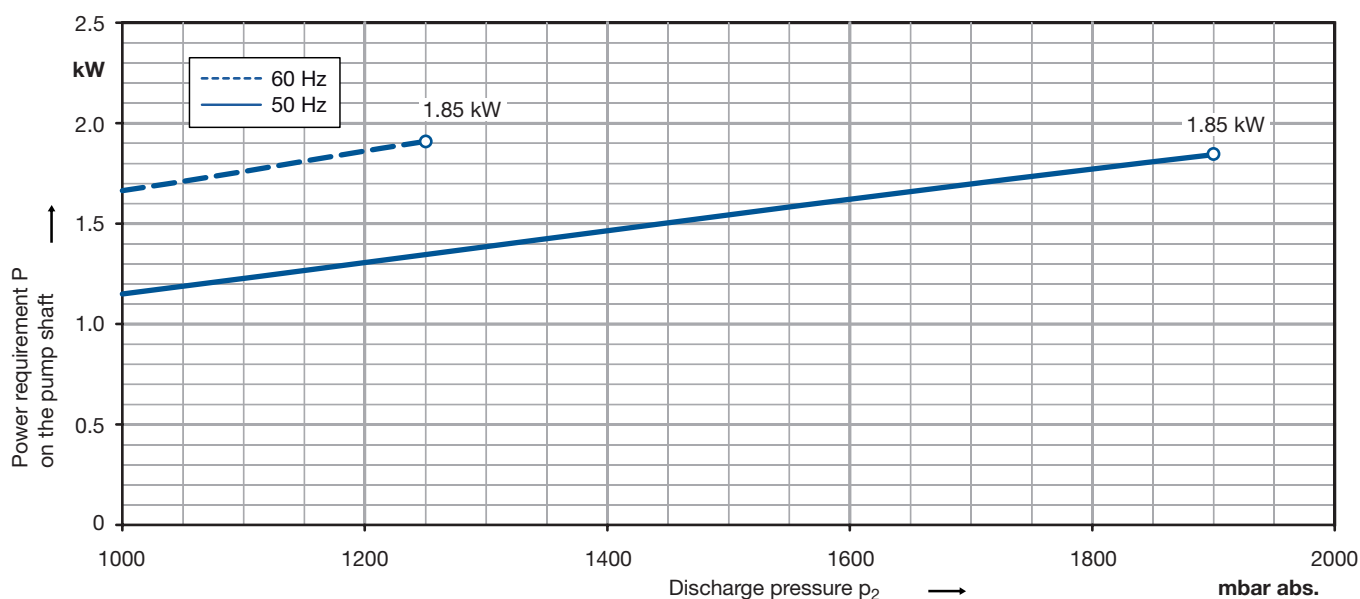

Performance curves for compressor operation

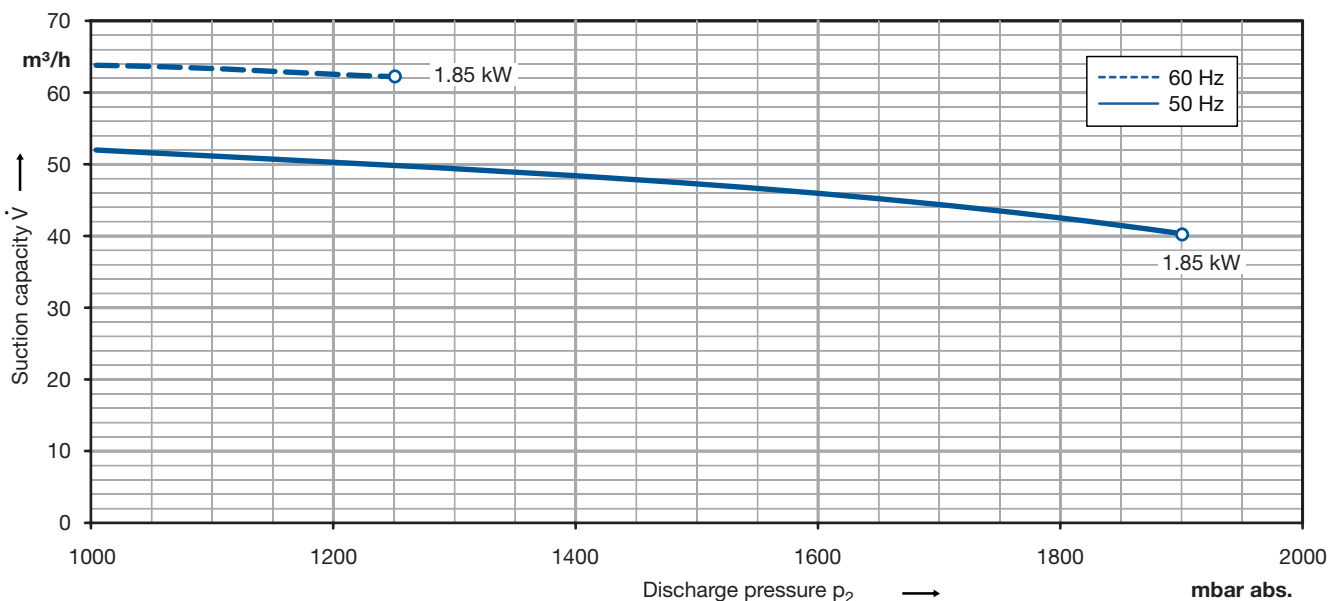

The characteristics are valid for the inlet of air with a relative humidity of 50 % and a temperature of 20 °C at a atmospheric pressure of 1013 mbar abs. and water at 15 °C as operating liquid.
The tolerance is ± 10 %.

The motors are supplied as standard for fixed voltage of 50 resp. 60 Hz and in protection category IP 55. The Compressors are certified according to ATEX 94/9 EG, category 2G.